VISOFOLD 1000 SLIM Order Form

smart architectural aluminium

WarmerAluminium
FULL RANGE OF ARCHITECTURAL ALUMINIUM PRODUCTS

Reference:	Requested Delivery Date:
Company Name:	Delivery Address:
Telephone:	Customer Signature:
Email Address:	Date:

Clearly mark on the grid shown the configuration required. The elevation of the door is as viewed from outside. Mark along the arrows the direction that each panel has to travel. If you have 2 swing panels, indicate on this drawing which panel you would like to open first (with "FIRST")

(must be kit form if over 5100mm)

☐ Assembled ☐ Kit Form

☐ Glazed ☐ Unglazed

WIDTH (mm) _____ **HEIGHT** (mm) _____

All head packers Included in height

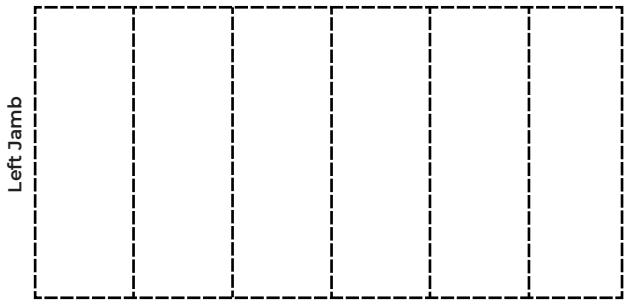

Maximum sash size 1200mm x 2500mm
Minimum recommended sash size 700mm x 1775mm





SINGLE COLOUR

☐ White ☐ Grey ☐ Black

Other .....

DUAL COLOUR

INT RAL No .....

EXT RAL No .....

ACCESSORIES COLOUR

☐ White ☐ Black ☐ Grey ☐ Chrome ☐ Satin

CILL

Included in overall frame height (cill height is 25mm)

☐ 150mm ☐ 190mm ☐ 225mm ☐ NO CILL

TRICKLE VENTS

Please draw position on grid

Quantity ..... ☐ In 42mm head packer

BOTTOM TRACK DETAIL

☐ Standard outer frame 51.5mm

☐ Low threshold 15mm (Disclaimer required)

(Satin anodised only & not weather rated)

OPENING

☐ Inward

☐ Outward

MAGNETIC PANEL CATCH

☐ Chrome ☐ Colour Matched

DRAINAGE REQUIRED

☐ Face ☐ Concealed

☐ None *(Only if internal door)*

PACKERS

☐ 42mm

☐ 20mm

☐ Top ☐ LHS ☐ RHS

CUSTOMER NOTES:

It is installers responsibility to call up any requirements for building regulations

Head Office & Factory: The Workshop, Manor Road, Marston Trading Estate, Frome, Somerset, BA11 4BN

Tel: 01373 473900 | **Email: ali@warmerroof.com**